








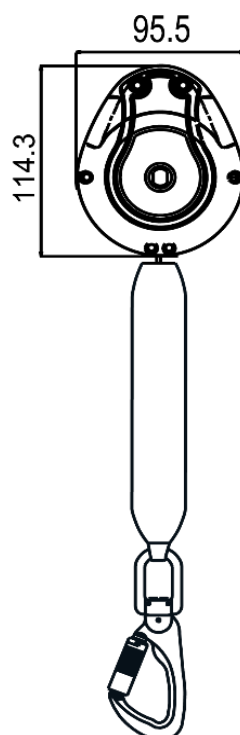





FA 20 502 02


P. 1 | 2

# Olympic-S2





<b>HS CODE</b>
84798997
<b>CARTON SIZE / PCS.</b>
60 x 40 x 24 cm / 16
<b>AET N°2777/10834-04/E13-02</b>
<b>Satra Technology Europe Ltd., N° 2777,</b> Bracetown Business Park, Clonee, Dublin, D15YN2P, Ireland
<b>MODULE D FI14/14003.01</b>
<b>SGS Fimko Oy, N°0598</b> Takomotie 8, 00380 HELSINKI, Finland


<b>REF.</b>	<b>FA 20 502 02</b>
<b>LG.</b>  <b>KG</b>	2.0 m
<b>CE</b>	EN 360:2002
<b>MAT.</b>  	Polyamide 6 - 30% fiber glass  Aramid 21 mm
	 FA 50 201 22 / FA 50 221 17 with fall indicator
	x2
<b>R(kN)</b>	15 kN
	YES
<b>+</b>	PPE-R 11.060, FACTOR 2
	1.00 KG

**LG.**  
  
**KG**

**Longueur** Poids maxi utilisateur  
**Length** Max. user weight  
**Longitud** Peso máximo del usuario  
**Lunghezza** Peso Max. dell'utente  
**Länge** Höchstgewicht des Benutzers

**MAT.**  
  



**Matière carter / sangle**  
Material of casing / webbing  
**Material cárter / correa**  
Material dei carter / Cinghia  
**Material Gehäuse / Gurt**



**Matière connecteur haut / connecteur bas**  
Material of top connector / bottom connector  
**Material conector alto / conector bajo**  
Materiale connettore alto / connettore basso  
**Material oberes / unteres Verbindungselement**



**Nombre d'émerillons**  
Number of swivels  
**Cantidad de eslabones giratorios**  
Numero di tornichetti  
**Anzahl der Wirbel**



**Homologué pour le travail à proximité d'arêtes vives**  
Approved for work near sharp edges  
**Homologado para trabajo cerca de aristas vivas**  
Omologato per lavoro in prossimità di spigoli vivi  
**Zugelassen für Arbeiten in der Nähe scharfer Kanten**